

PLEXSTONE

CREATION

Solid Slab


We start with a full slab of slate and prepare it for peeling by adding fiberglass and resin.

Step 1

Step 2

Peeled Layer

After a few steps involving very high heat and lots of adhesive, we literally peel away a millimeters-thin layer from the slate slab.

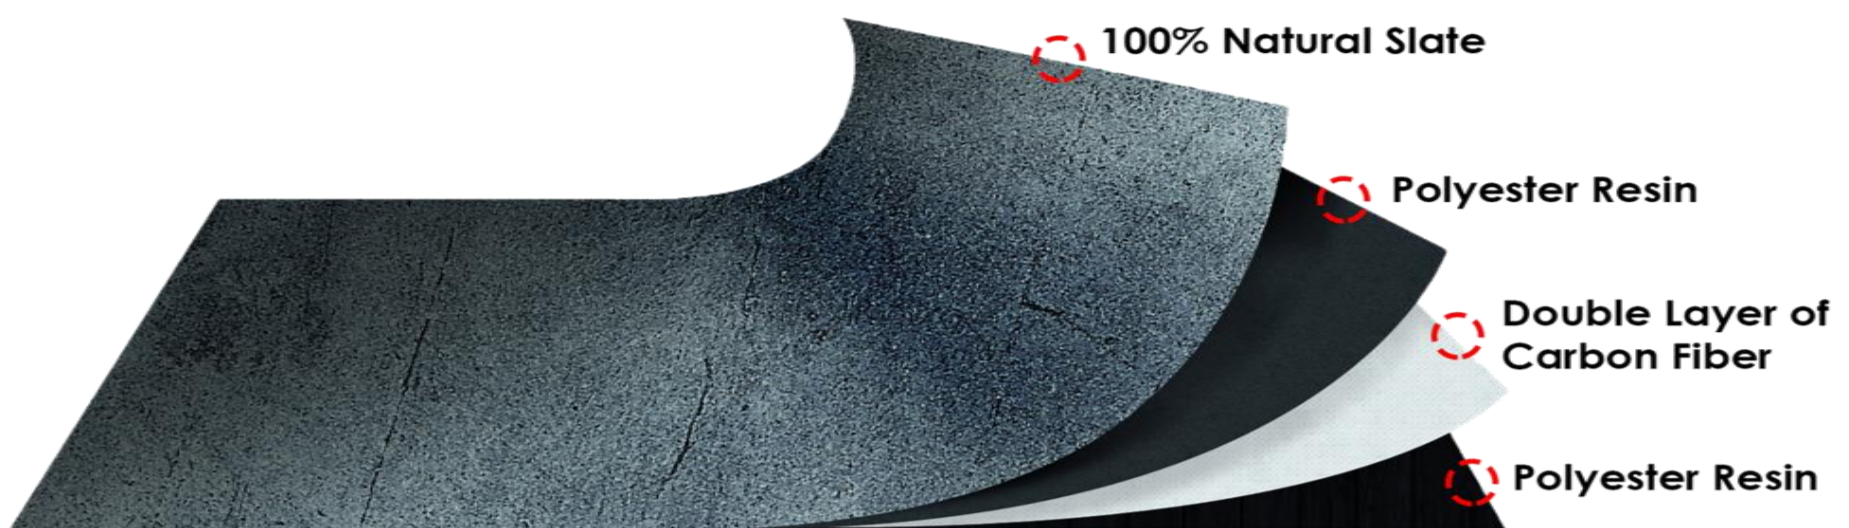

VARIATION


Your Style

As natural stone, Flexstone has a beautiful variety. Due to its thinness, this material displays an exotic translucency when backlit. Available in panels or tiles, this material can fit any project.



Your Project

With the many color, size and translucent varieties, the only limitation for this material is your imagination. Resistant to water and scratching, Flexstone is suitable for any environment.

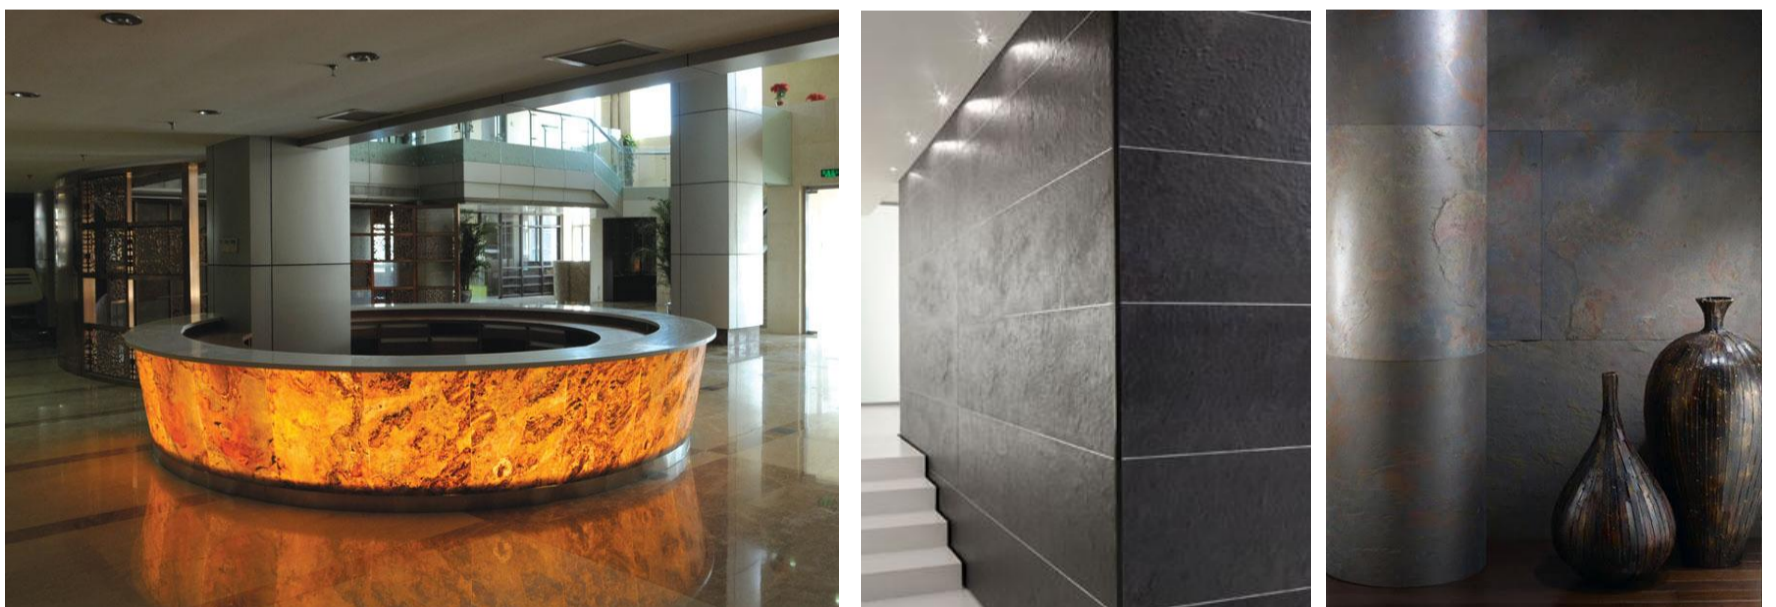

INSTALLATION



Apply Adhesive evenly to the project surface with a trowel



Add grout to gaps if needed, and Enjoy your new stone!

1st

2nd

3rd

4th



Seal the Flexstone for extra protection against damage.



Using a roller, place the Flexstone as desired to ensure even adhesion.

This product is available exclusively through Siman Stones and our affiliates. For more information, additional pictures, and available colors visit www.simanstones.com
Get in touch with me: Field Palmer - marketing@simanstones.com - +91 787-568-2826

